

FIG. 1

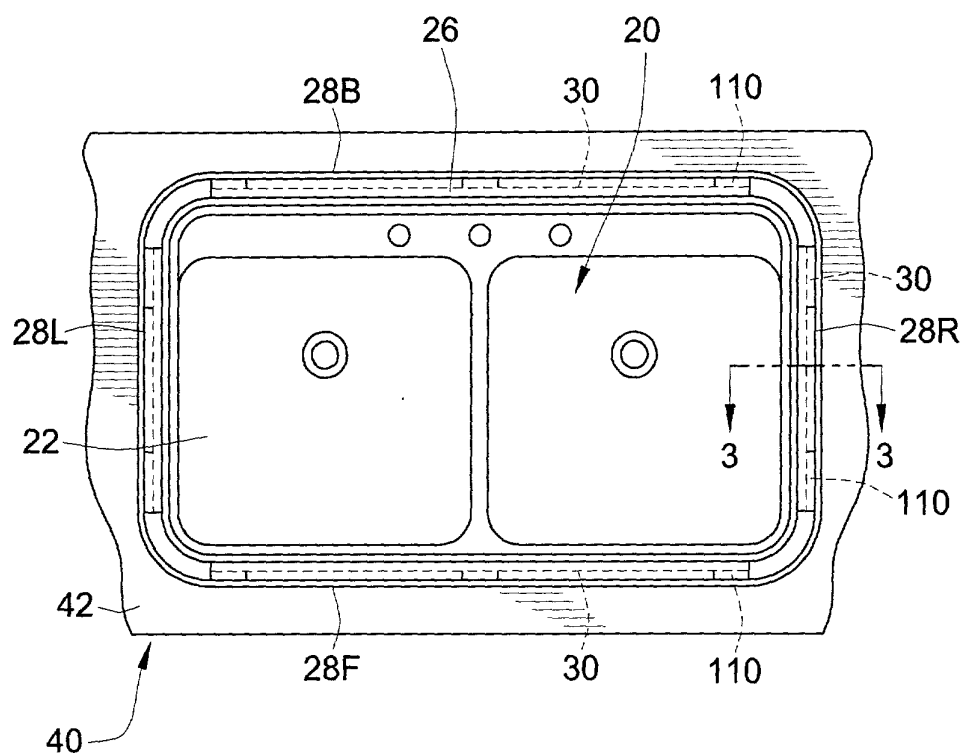


FIG. 2 is a cross-sectional view of a mechanical assembly. A central component 10 is shown with a threaded section 110 and a flange 112. A sleeve 160 is positioned around the central component, with a seal 170A and 170B. A pipe 20 is connected to the sleeve. A block 40 is shown with a curved surface 42 and a flat surface 44. A bolt 172 is used to secure the assembly. Other labels include 100, 178, 114, 116, 168, 179, 174, 30, 32, 34, 176, and 26.

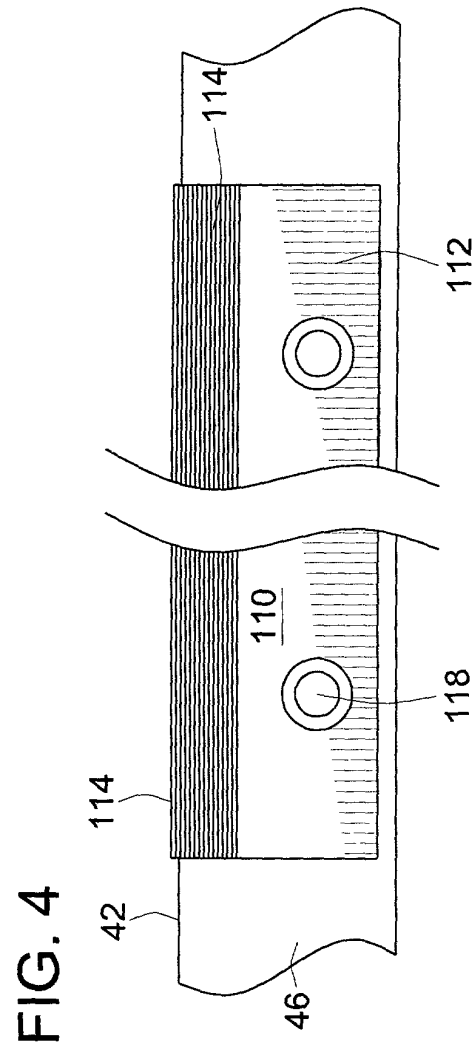


FIG. 5

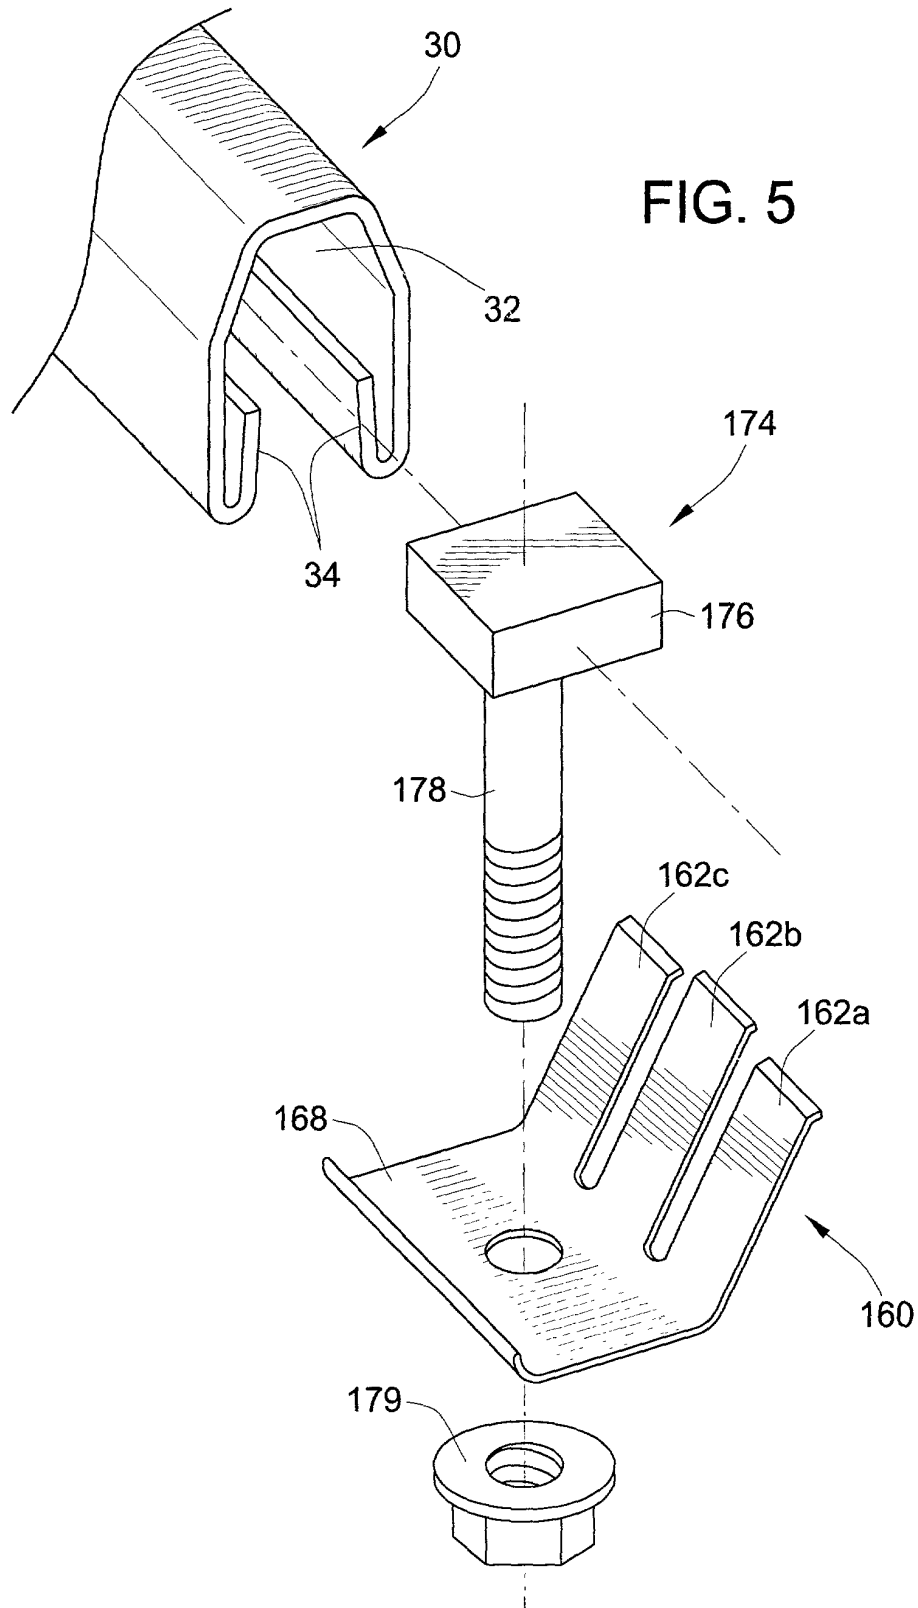


FIG. 6

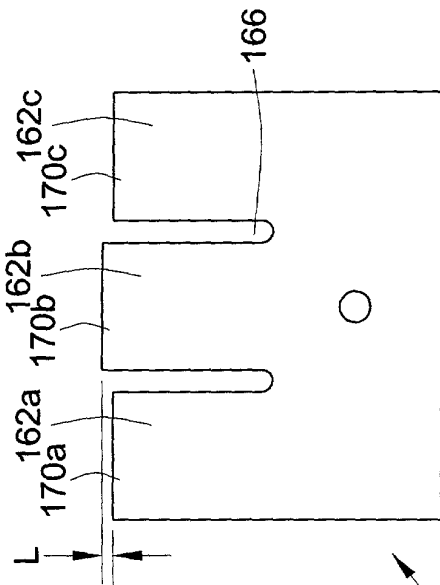


FIG. 6

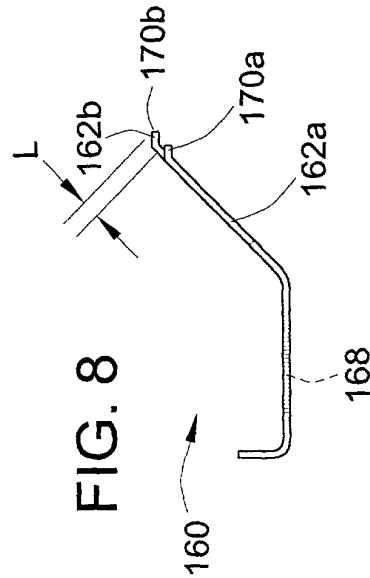


FIG. 8

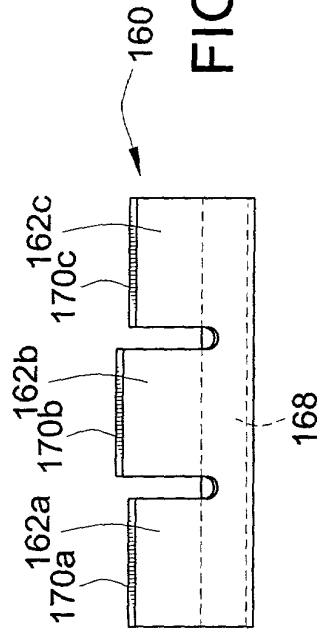


FIG. 7

FIG. 9

